

Civils & Highways / Active Travel Kerbs / Highway / Highway 280-300


Highway 280-300x240

280-300x240 | Radius | L-590 | External | 0.75m | Half-Battered | VB

SPECIFICATION

Highway 280-300x240 | 280-300x240 | Radius | L-590 | External | 0.75m | Half-Battered | VB
SKU: ATK-HWO-003-6349

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavar, Metallo
Size	280-300(w) x 240(d) x 590(l)
Weight Per Unit	78.1kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	8.32 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-28-30x24xL59-0.75m-VB
Type	Radius External
End Style	VB
Profile	280-300x240
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	0.75m
Number per 360	8
Slope Angle	-
Slope Gradient	-

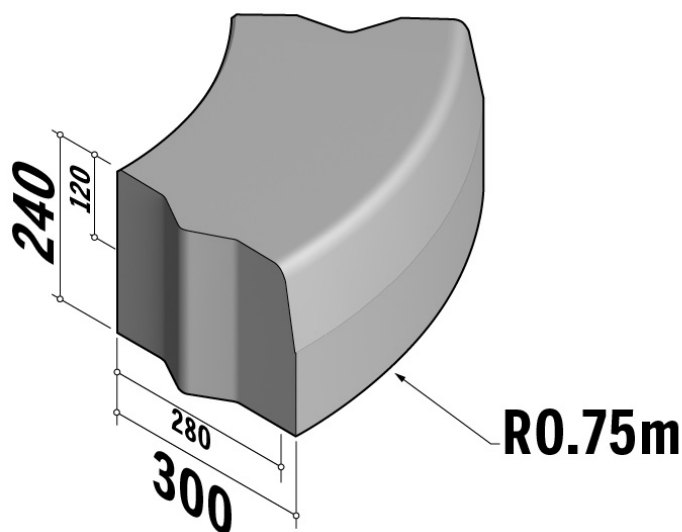

Active Travel Kerbs are available in a range of colours, finishes and materials.

 View product online at : <https://hardscape.co.uk/product/Highway-280-300x240-280-300x240-Radius-L-590-External-0-75m-Half-Battered-VB/>

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.