

Civils & Highways / Active Travel Kerbs / Entry Kerb


Entry Kerb 280-300

600x200x500 VB | L-500 | Left | Half-Battered | VBSQ

SPECIFICATION

Entry Kerb 280-300 | 600x200 | L-500 | Left | Half-Battered | VBSQ
SKU: ATK-HWO-006-6409

Material	Concrete, Kellen
Finish	Standard, Lavarò
Size	600(w) x 200(d) x 500(l)
Weight Per Unit	120.9kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	12.88 kgCO ₂ e/unit
Dutch Ref.	INRITBANDEN-60x20xL50-VB-LINKS
Type	-
End Style	VBSQ
Profile	600x200
Position	Left
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	9°
Slope Gradient	1:6

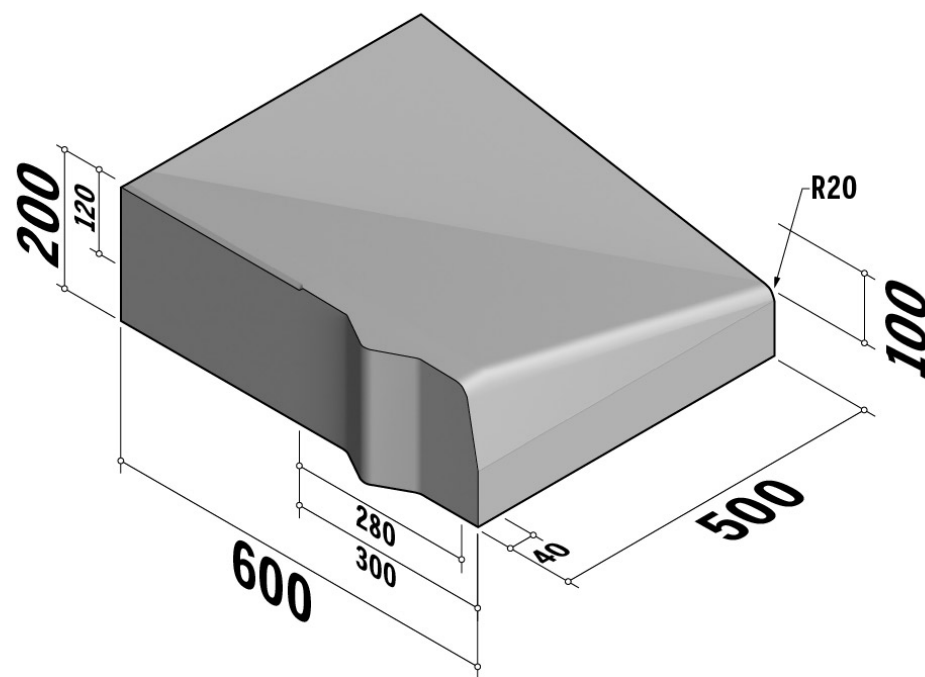

Active Travel Kerbs are available in a range of colours, finishes and materials.