

Civils & Highways / Active Travel Kerbs / Entry Kerb

Entry Kerb 280-300


900x240x500 VB | L-500 | Right | Half-Battered | VB

SPECIFICATION

Entry Kerb 280-300 | 900x240 | L-500 | Right | Half-Battered | VB

SKU: ATK-HWO-006-6414

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavar, Metallo
Size	900(w) x 240(d) x 500(l)
Weight Per Unit	215kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	22.91 kgCO ₂ e/unit
Dutch Ref.	INRITBANDEN-90x24xL50-VB-RECHTS
Type	-
End Style	VB
Profile	900x240
Position	Right
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	7°
Slope Gradient	1:8.1

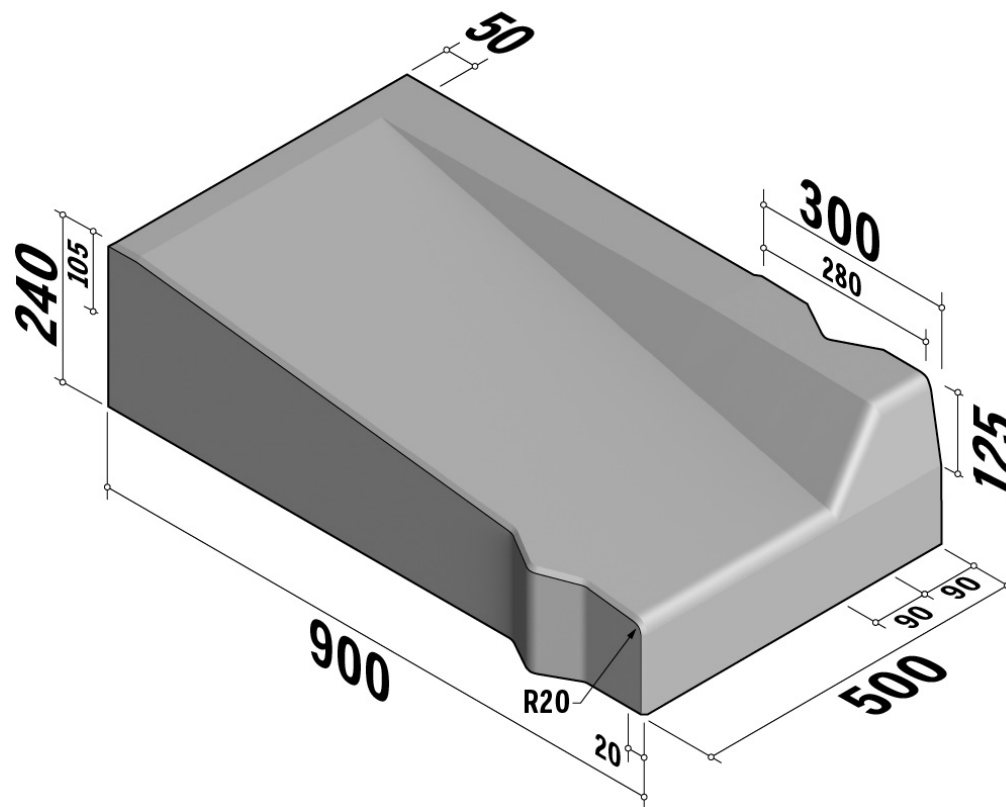

Active Travel Kerbs are available in a range of colours, finishes and materials.