

Civils & Highways / Active Travel Kerbs / Highway / Highway 380-400


Highway 380-400x250

380-400x250 | Radius | L-960 | External | 8m | Half-Battered | VB

SPECIFICATION

Highway 380-400x250 | 380-400x250 | Radius | L-960 | External | 8m | Half-Battered | VB
SKU: ATK-HWP-001-6420

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavar, Metallo
Size	380-400(w) x 250(d) x 960(l)
Weight Per Unit	213kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	22.7 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-38-40x25xL96-8m-VB
Type	Radius External
End Style	VB
Profile	380-400x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	8m
Number per 360	52
Slope Angle	-
Slope Gradient	-

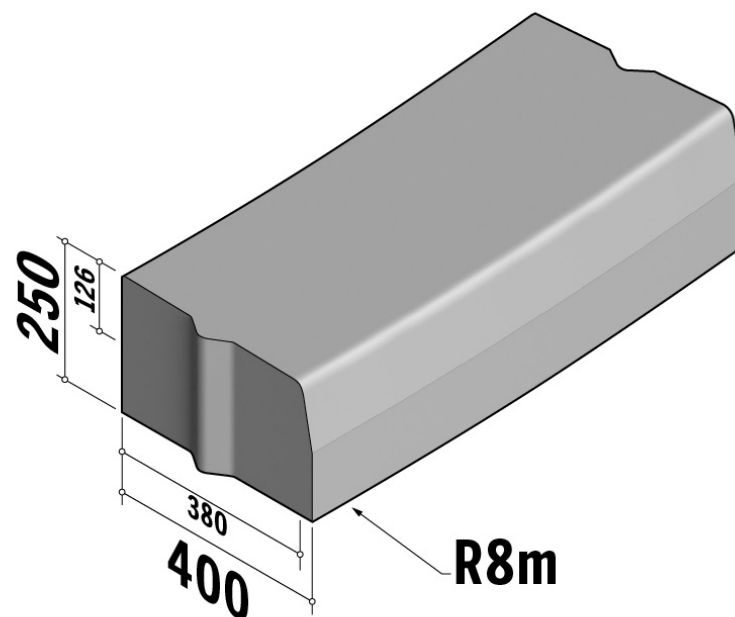

Active Travel Kerbs are available in a range of colours, finishes and materials.

 View product online at : <https://hardscape.co.uk/product/Highway-380-400x250-380-400x250-Radius-L-960-External-8m-Half-Battered-VB/>

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.