

Civils & Highways / Active Travel Kerbs / Entry Kerb

Entry Kerb 380-400


700x250x400 VB | L-400 | Right | Half-Battered | VB

SPECIFICATION

Entry Kerb 380-400 | 700x250 | L-400 | Right | Half-Battered | VB

SKU: ATK-HWP-001-6427

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavaró
Size	700(w) x 250(d) x 400(l)
Weight Per Unit	160.4kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	17.09 kgCO ₂ e/unit
Dutch Ref.	INRITPERRONBANDEN-70x25xL40-VB-RECHTS
Type	-
End Style	VB
Profile	700x250
Position	Right
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

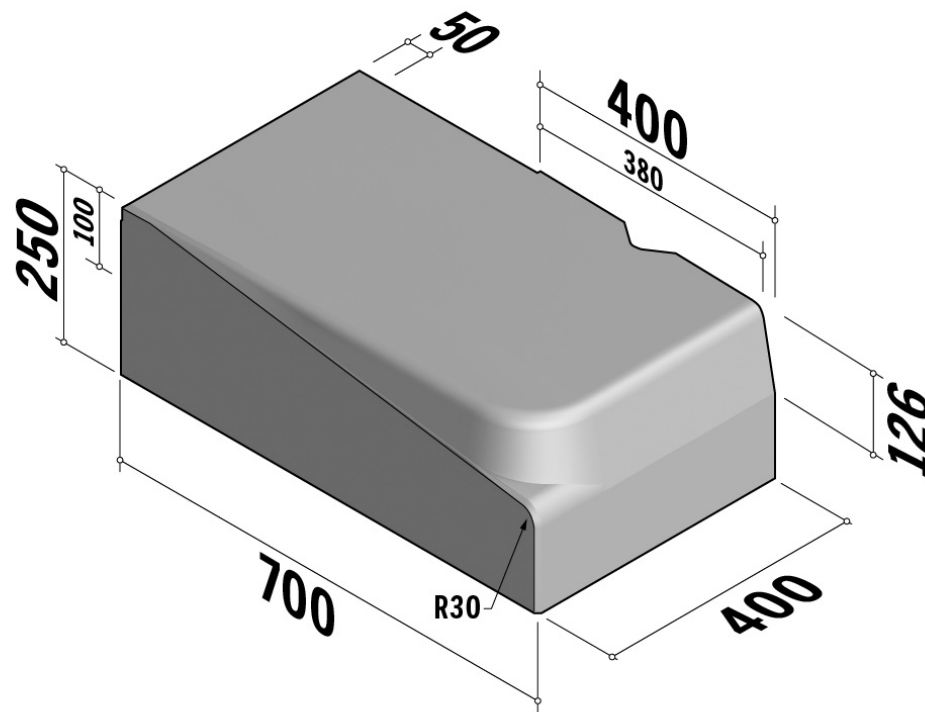

Active Travel Kerbs are available in a range of colours, finishes and materials.