

Civils & Highways / Active Travel Kerbs / Highway / Highway 380-400

Highway 380-400x250


380-400x250 | Return Radial | to 580-600x250 | Internal | 90° | 0.2m | Half-Battered | VB

SPECIFICATION

Highway 380-400x250 | 380-400x250 | Return Radial | to 580-600x250 | Internal | 90° | 0.2m | Half-Battered | VB

SKU: ATK-HWP-001-6431

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavar, Metallo
Size	380-400(w) x 250(d)
Weight Per Unit	260kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	27.7 kgCO ₂ e/unit
Dutch Ref.	HOEKBLOKKEN-38-40x25_58-60x25-0.2m-90°-VB-inw
Type	Return Radial Internal
End Style	VB
Profile	380-400x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	90°
Radius	0.2m
Number per 360	-
Slope Angle	-
Slope Gradient	-

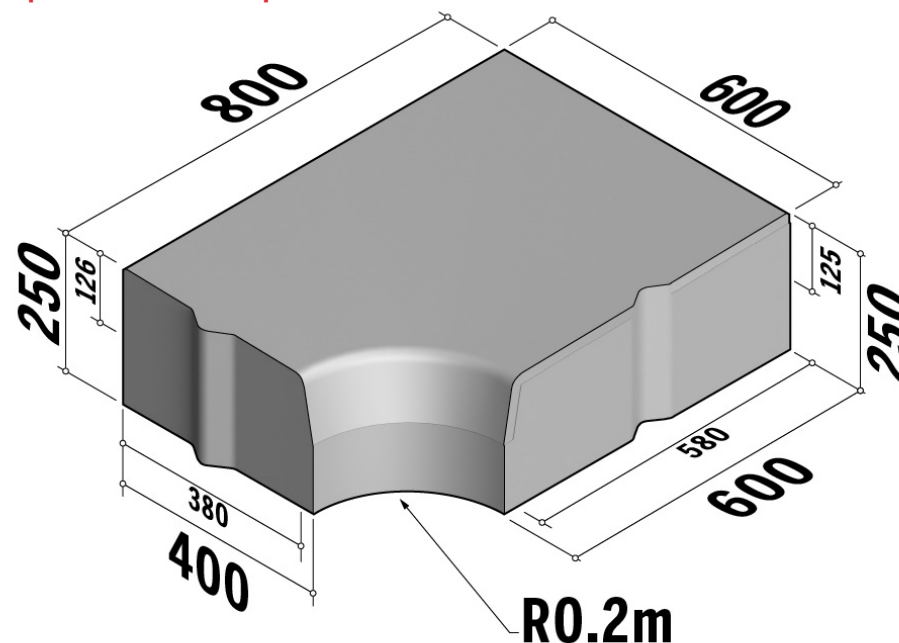

Active Travel Kerbs are available in a range of colours, finishes and materials.