

Civils & Highways / Active Travel Kerbs / Highway / Highway 480-500


Highway 480-500x160

480-500x160 | Radius | L-940 | Internal | 6m | Half-Battered | SQ

SPECIFICATION

Highway 480-500x160 | 480-500x160 | Radius | L-940 | Internal | 6m | Half-Battered | SQ
SKU: ATK-HWS-001-6493

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavarò, Metallo
Size	480-500(w) x 160(d) x 940(l)
Weight Per Unit	173.55kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	18.49 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-48-50x16xL94-6m-VL-inw
Type	Radius Internal
End Style	SQ
Profile	480-500x160
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	6m
Number per 360	40
Slope Angle	-
Slope Gradient	-

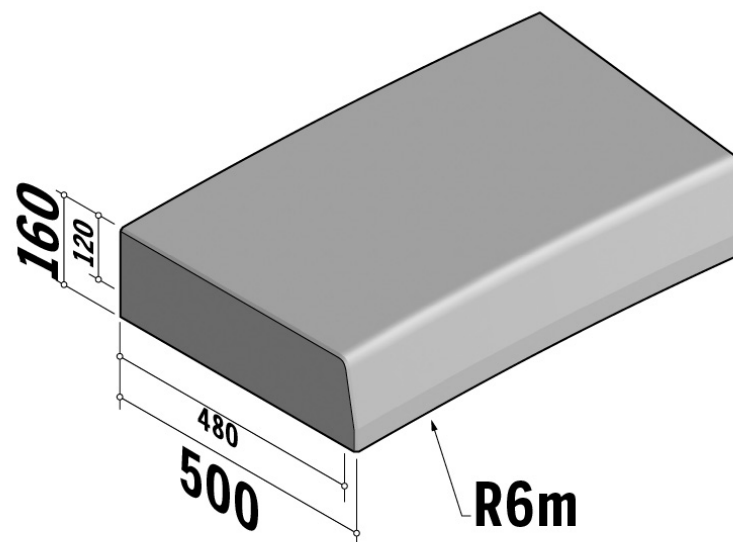

Active Travel Kerbs are available in a range of colours, finishes and materials.