

Civils & Highways / Active Travel Kerbs / Highway / Highway 480-500


# Highway 480-500x160

480-500x160 | Return Point | 120° | 0.6m | Half-Battered | SQ

## SPECIFICATION

**Highway 480-500x160 | 480-500x160 | Return Point | 120° | 0.6m | Half-Battered | SQ**  
**SKU: ATK-HWS-001-6509**

|                                 |                                    |
|---------------------------------|------------------------------------|
| Material                        | Concrete, Kellen                   |
| Finish                          | Standard Wet Cast, Lavaro, Metallo |
| Size                            | 480-500(w) x 160(d)                |
| Weight Per Unit                 | 133.33kg                           |
| Manufacturing Standard          | BS EN 1340:2003                    |
| Density                         | 2350 kg/m <sup>3</sup>             |
| GWP (total) kgCO <sub>2</sub> e | 14.21 kgCO <sub>2</sub> e/unit     |
| Dutch Ref.                      | PUNTSTUKKEN-48-50x16-0.6m-120°-VL  |
| Type                            | Return Point                       |
| End Style                       | SQ                                 |
| Profile                         | 480-500x160                        |
| Position                        | -                                  |
| Face                            | Half-Battered                      |
| Face Angle                      | 81°                                |
| Return Angle                    | 120°                               |
| Radius                          | 0.6m                               |
| Number per 360                  | -                                  |
| Slope Angle                     | -                                  |
| Slope Gradient                  | -                                  |

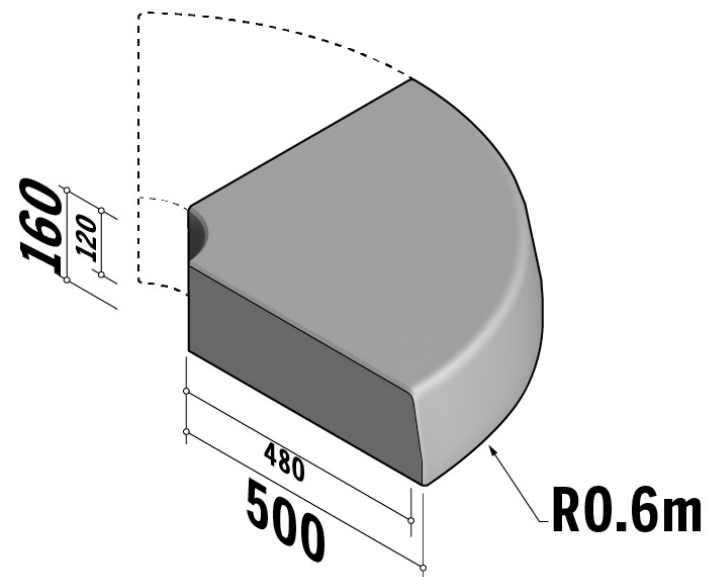

**Available in 5° increments**

Active Travel Kerbs are available in a range of colours, finishes and materials.