

Manufactured Paving / Kellen / Double XL Slabs


# Double XL Aesthetic

Joint Reinforced | 1995x995x160

## SPECIFICATION

**Double XL Aesthetic | Joint Reinforced | 1995x995x160**
**SKU: KEL-SLA-DXA-032**

|                                 |                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                        | Concrete                                                                                                                                        |
| Finish                          | RAS Anti-Slip DXL                                                                                                                               |
| Size                            | 1995(w) x 995(l) x 160(d)                                                                                                                       |
| Weight Per Unit                 | 771kg                                                                                                                                           |
| Manufacturing Standard          | BS EN 1338:2003                                                                                                                                 |
| Density                         | 2350 kg/m <sup>3</sup>                                                                                                                          |
| GWP (total) kgCO <sub>2</sub> e | 82.15 kgCO <sub>2</sub> e/unit                                                                                                                  |
| Dutch Ref.                      | VLOERPLAAT MET SCHIJNVOEG CONSTRUCTIEF-199.5x99.5x16                                                                                            |
| Position                        | -                                                                                                                                               |
| Radius                          | -                                                                                                                                               |
| Edge Style                      | 5x5mm                                                                                                                                           |
| Fitted With                     | Without lifting tubes, installation via vacuum lifting only.                                                                                    |
| Further Information             | VOSB load class 600+; Axle Loads 25 tonnes; Forklift (solid tires) 14.5 tonnes; Forklift (pneumatic tires) 14.5 tonnes; Point loads 10.5 tonnes |

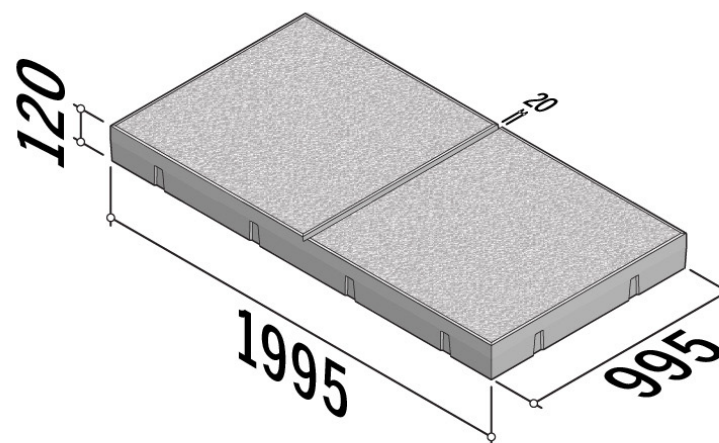

Available in a range of colours