CREATIVE LANDSCAPING WORKS


074 920 5039
info@creativelandscapingworks.com
www.creativelandscapingworks.com

kellen from HARDSCAPE

Manufactured Paving / Kellen / Double XL Slabs

Double XL Liquid Tight

Commercial Environment Reinforced | 1995x1495x180

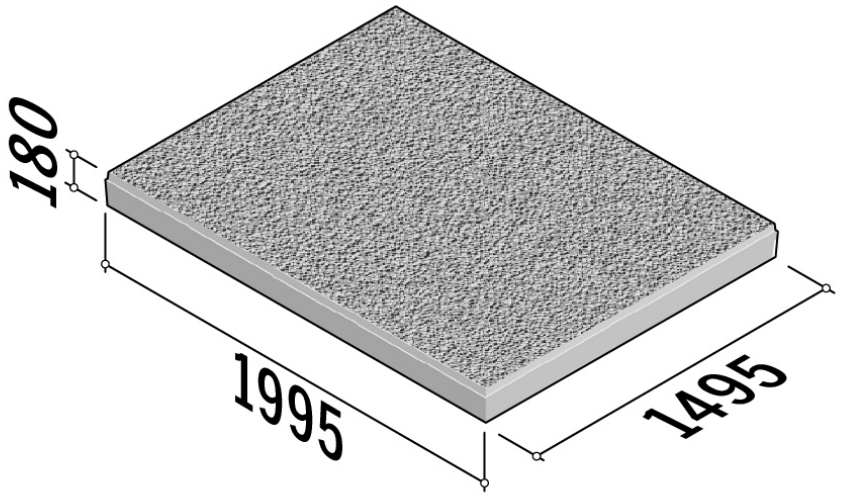

SPECIFICATION

Double XL Liquid Tight | Commercial Environment Reinforced | 1995x1495x180

SKU: KEL-SLA-DXT-011

Material	Concrete
Finish	RAS Anti-Slip DXL
Size	1995(w) x 1495(l) x 180(d)
Weight Per Unit	1298kg
Manufacturing Standard	BS EN 1338:2003
Density	2350 kg/m³
GWP (total) kgCO2e	138.31 kgCO2e/unit
Dutch Ref.	BEDRIJFSMILIEU VLOERPLAAT CONSTRUCTIEF-199.5x149.5x18
Position	-
Radius	-
Edge Style	5x5mm
Fitted With	Without lifting tubes, installation via vacuum lifting only.
Further Information	VOSB load class 600+; Axle Loads 25 tonnes; Forklift (solid tires) 14.5 tonnes; Forklift (pneumatic tires) 14.5 tonnes; Point loads 10.5 tonnes

Available in a range of colours

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.