


Manufactured Paving / Kellen / Double XL Slabs

# Double XL Liquid Tight

Commercial Environment Reinforced | 1995x1995x180

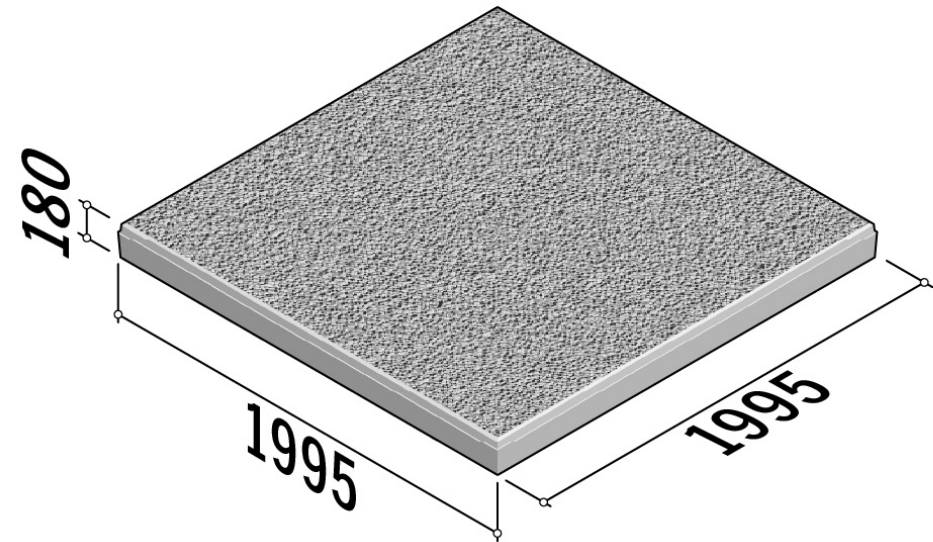

## SPECIFICATION

**Double XL Liquid Tight | Commercial Environment Reinforced | 1995x1995x180**

**SKU: KEL-SLA-DXT-012**

|                                 |                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                        | Concrete                                                                                                                                        |
| Finish                          | RAS Anti-Slip DXL                                                                                                                               |
| Size                            | 1995(w) x 1995(l) x 180(d)                                                                                                                      |
| Weight Per Unit                 | 1731kg                                                                                                                                          |
| Manufacturing Standard          | BS EN 1338:2003                                                                                                                                 |
| Density                         | 2350 kg/m <sup>3</sup>                                                                                                                          |
| GWP (total) kgCO <sub>2</sub> e | 184.44 kgCO <sub>2</sub> e/unit                                                                                                                 |
| Dutch Ref.                      | BEDRIJFSMILIEU VLOERPLAAT CONSTRUCTIEF-199.5x199.5x18                                                                                           |
| Position                        | -                                                                                                                                               |
| Radius                          | -                                                                                                                                               |
| Edge Style                      | 5x5mm                                                                                                                                           |
| Fitted With                     | Without lifting tubes, installation via vacuum lifting only.                                                                                    |
| Further Information             | VOSB load class 600+; Axle Loads 25 tonnes; Forklift (solid tires) 14.5 tonnes; Forklift (pneumatic tires) 14.5 tonnes; Point loads 10.5 tonnes |

Available in a range of colours

View product online at : <https://hardscape.co.uk/product/Double-XL-Liquid-Tight-Commercial-Environment-Reinforced-1995x1995x180/>