


Manufactured Paving / Kellen / Double XL Slabs

Double XL Liquid Tight

Stabilo-W Connector | 1995x1995x180

Galvanized steel coupling edge (edge strip). Matching coupling material available in the form of wedges, crosses, and T-pieces.

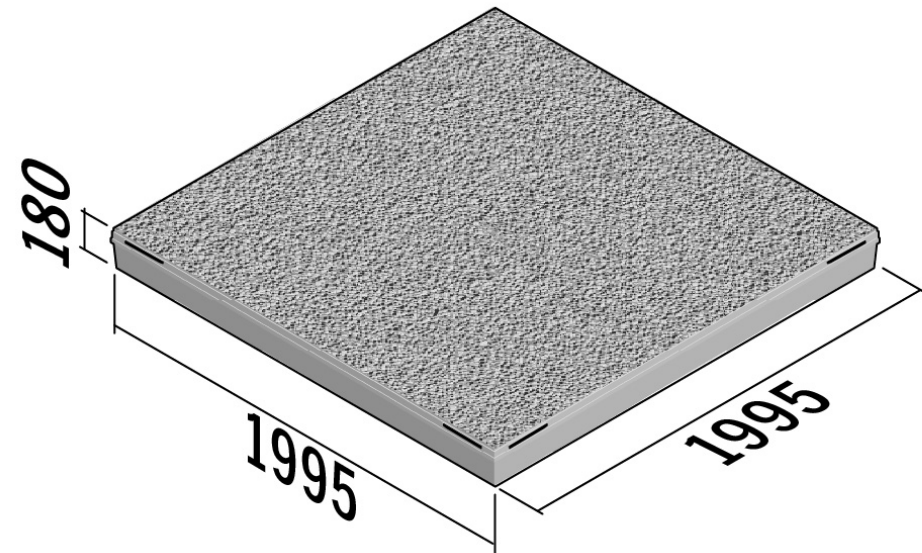

SPECIFICATION

Double XL Liquid Tight | Stabilo-W Connector | 1995x1995x180

SKU: KEL-SLA-DXT-022

Material	Concrete
Finish	RAS Anti-Slip DXL
Size	1995(w) x 1995(l) x 180(d)
Weight Per Unit	1832kg
Manufacturing Standard	BS EN 1338:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	195.21 kgCO ₂ e/unit
Dutch Ref.	STABILO-W® KOPPELPLAAT-199.5x199.5x18
Position	-
Radius	-
Edge Style	Galvanized steel coupling edge (edge strip)
Fitted With	Without lifting tubes, installation via vacuum lifting only.
Further Information	Double mesh non-structural reinforcement. VOSB load class 600; Axle Loads up to 20 tonnes; Forklift (solid tires) 7.5 tonnes; Forklift (pneumatic tires) 9 tonnes; Point loads 5 tonnes

Available in a range of colours