


Manufactured Paving / Kellen / Double XL Slabs

Double XL Liquid Tight

Stabilo-W Connector Reinforced | 1995x1495x180

Galvanized steel coupling edge (edge strip). Matching coupling material available in the form of wedges, crosses, and T-pieces.

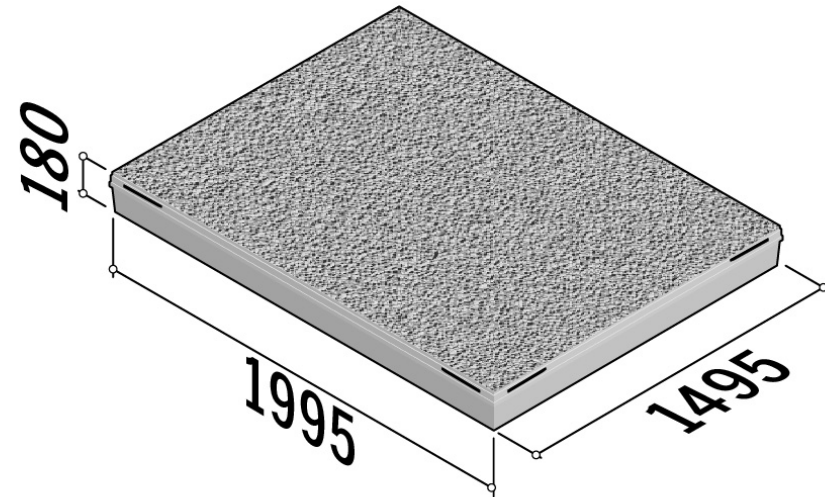

SPECIFICATION

Double XL Liquid Tight | Stabilo-W Connector Reinforced | 1995x1495x180

SKU: KEL-SLA-DXT-031

Material	Concrete
Finish	RAS Anti-Slip DXL
Size	1995(w) x 1495(l) x 180(d)
Weight Per Unit	1337kg
Manufacturing Standard	BS EN 1338:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	142.46 kgCO ₂ e/unit
Dutch Ref.	STABILO-W® KOPPELPLAAT CONSTRUCTIEF-199.5x149.5x18
Position	-
Radius	-
Edge Style	Galvanized steel coupling edge (edge strip)
Fitted With	Without lifting tubes, installation via vacuum lifting only.
Further Information	VOSB load class 600+; Axle Loads 25 tonnes; Forklift (solid tires) 14.5 tonnes; Forklift (pneumatic tires) 14.5 tonnes; Point loads 10.5 tonnes

Available in a range of colours

View product online at : <https://hardscape.co.uk/product/Double-XL-Liquid-Tight-Stabilo-W-Connector-Reinforced-1995x1495x180/>