CREATIVE LANDSCAPING WORKS

074 920 5039
info@creativelandscapingworks.com
www.creativelandscapingworks.com

kellen from HARDSCAPE

Manufactured Paving / Kellen / Double XL Slabs

Double XL Standard

Strip Edge Reinforced | 1995x1995x140

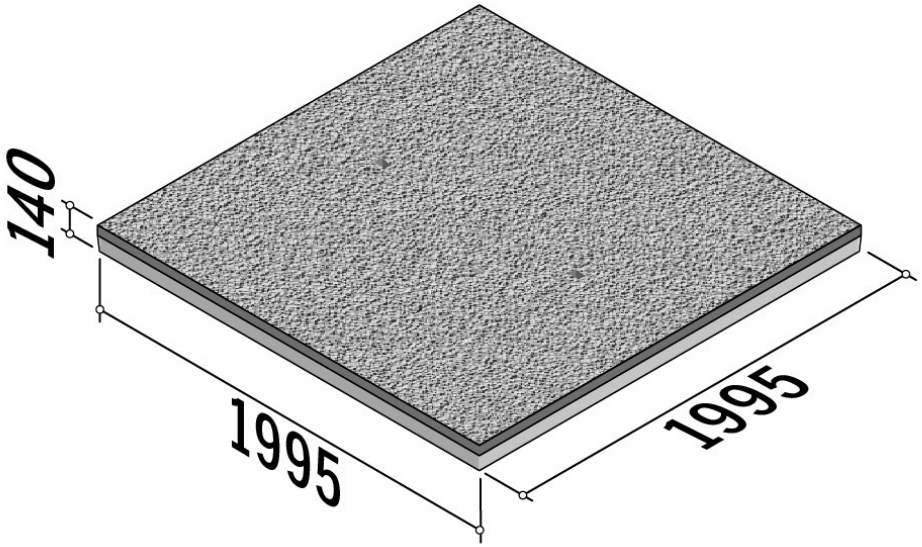

SPECIFICATION

Double XL Standard | Strip Edge Reinforced | 1995x1995x140

SKU: KEL-SLA-DXL-054

Material	Concrete
Finish	RAS Anti-Slip DXL
Size	1995(w) x 1995(l) x 140(d)
Weight Per Unit	1375kg
Manufacturing Standard	BS EN 1338:2003
Density	2350 kg/m³
GWP (total) kgCO2e	146.51 kgCO2e/unit
Dutch Ref.	VLOERPLAAT STRIPRAND CONSTRUCTIEF-199.5x199.5x14
Position	-
Radius	-
Edge Style	Flat metal edge
Fitted With	With lifting tubes.
Further Information	Top & bottom structurally reinforced. VOSB load class 600+; Axle Loads 22 tonnes; Forklift (solid tires) 13.5 tonnes; Forklift (pneumatic tires) 15 tonnes; Point loads 9.5 tonnes

Available in a range of colours

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.