

PETRA is a collection of three concrete pieces of different sizes and organic shapes that evoke the nature of stones eroded by water. Designed as community seats to blend into public space or locations with scenic value. As an isolated element or combined in groups, they create recreational meeting points and stimulate communication, movement and a safe way for children to play.

Concrete | 195 cm | 2027 kg | 6

Update 24.11.2025



ORIGEN

Developed in response to the tactical urban planning interests of timing and also to discourage vehicle access to quiet public spaces. Incorporate the concept of a playable city encouraging sociability and motor learning.

DESIGN

Using oblong geometry and with their entire surface lightly curved, the Petra S and Petra L models are light inside to reduce weight.

MATERIAL

Molded concrete without reinforcement, speckled finish and in colors from the standard Escofet chart.

INSTALLATION

Petra XS resting on the paving, and anchored with three screws threaded through sleeves recessed in base.

Petra S and Petra L attached by using two slings, installation is as simple as suspending them over a pavement, compacted sand or a grass lawn, with no need for anchoring. The recessed base allows the slings to pass through for loading and unloading.






1. Backless Bench

Petra	XS	S	L
Dimensions	110 x 95 x 47 cm	188 x 117 x 48 cm	195 x 192 x 50 cm
Weight	728 kg	1366 kg	2027 kg


1.1 General features

Material	Concrete Recycled Concrete	Fixing	Free-standing
Finish	Etched and waterproofed		


Colours




GR. Grey




NG. Black




BL. White




CA. CA Grey



RA. Red



BG. Beige



EGR. Eco-Grey®


1.2 Installation system

Hoisting




P= 728 kg / 1366 kg / 2027 kg

Installation




Petra XS: Drill pavement Ø40 x 180 mm and fill with resin or fat mortar. Tightly screw the 2 stud bolts Din 931 M16 x 140 mm. Center and caulk the bench foot all around.

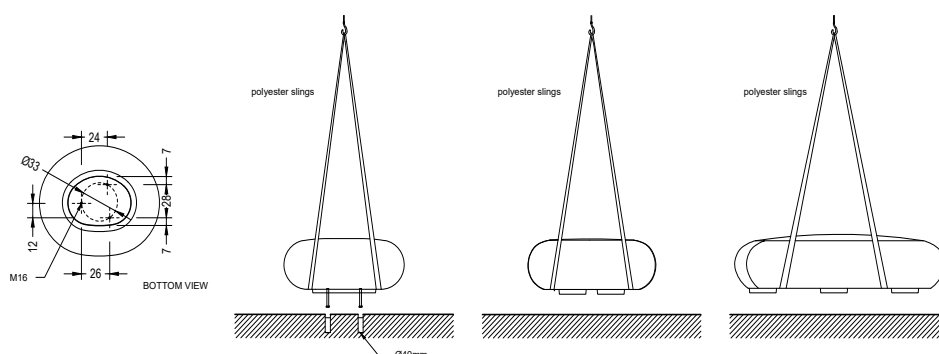





Petra S

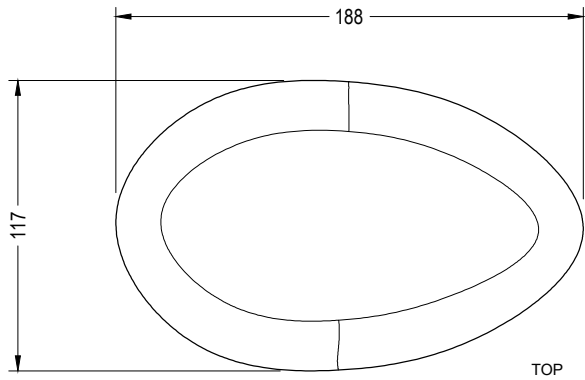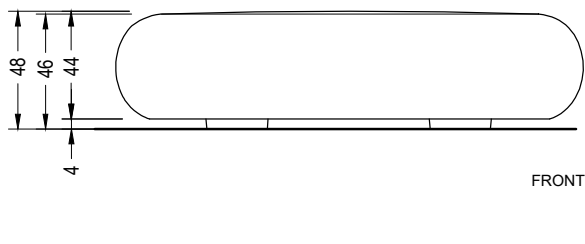

Petra L

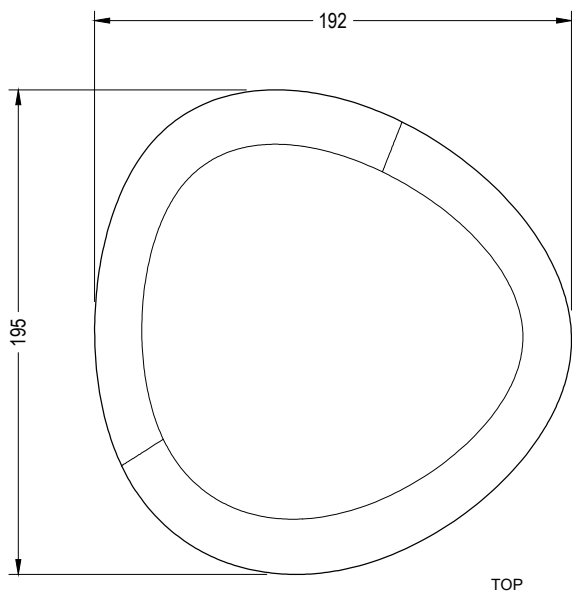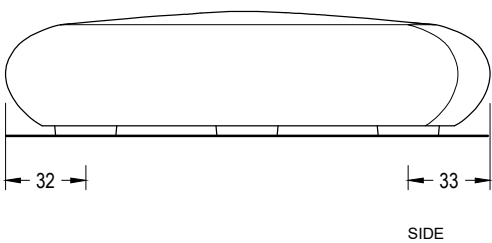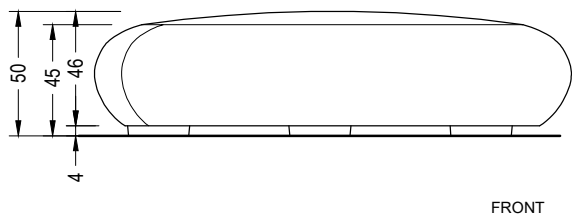

Petra XS

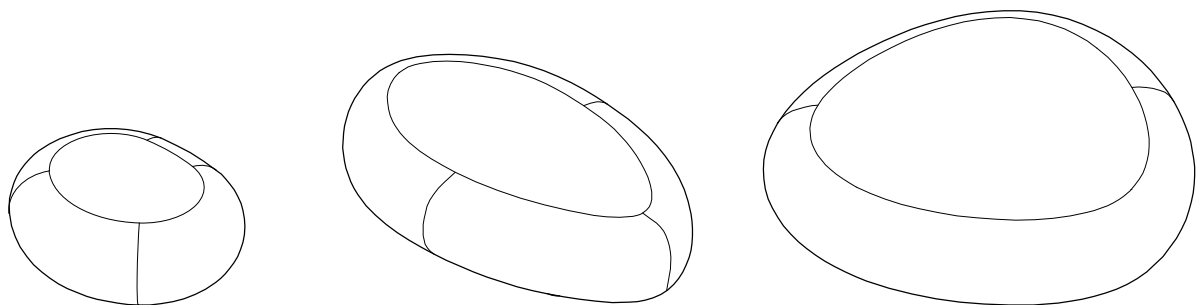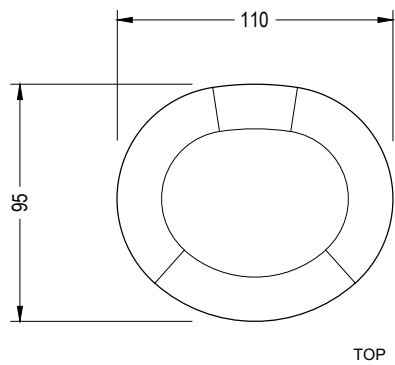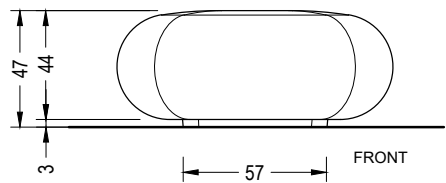

PETRA





Warranty

5 years in concrete elements


The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com

Escofet
by Molins[®]



GA-2005/0072



SST-0090/2010



ER-0403/2016

