MAYO

Mayo is a backless bench made from reinforced concrete and with a section formed by arches. The simplicity of this bench lies in its forceful, pure geometry. The perforated seat, like a checkerboard, permits the evacuation of rainwater and increases the ventilation effect, lowering the temperature in warm weather conditions.

Concrete | 296 cm/max | 812 kg | 6

Update 04.07.2023



Cruz y Ortiz 1990

fscofet®

MAYO

Origin

The architects Cruz and Ortiz created their first design called *Abril*, which was then followed by *Mayo* and *Junio*.

Universal

Mayo demonstrates its capacity to blend into the urban environment without imposing, and with the desire to remain due to its material condition. A design that is rigorous and simple in terms of its formulation, but universal in terms of its application.

Versatile

The backless bench is manufactured and edited in two sizes, *Mayo* 296 and *Mayo* 220.

Material

Bench made from reinforced, etched, water-repellent concrete in the *Escofet* standard colour chart.

Installation

Self-standing, with no need for anchors.



escofet®

MAYO







fscofet®

1. **Backless bench**

Mayo		**Mayo 296**	**Mayo 220**
Dimensions		296 x 86 x 45 cm	220 x 60 x 45 cm
Weight		812 kg	455 kg
1.1 General features			
Material	Reinforced concrete	**Fixing**	Free-standing
Finish	Etched and waterproofed		


Colours




GR. Grey




NG. Black




BL. White



CA. Grey CA



RA. Red




BG. Beige


1.2 Installation system


Hoisting
P=812 kg / 455 kg

Installation
Unloading by fork-lift:
Lift bench by interposing wooden boards that support bench by means of two rests placed at 2 m distance from each other.

Unloading by crane:
Place slings so as distance between suspension points be at least of 2 m.






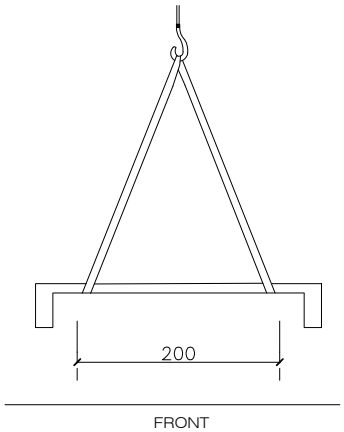


1.3 Geometry

Mayo 296

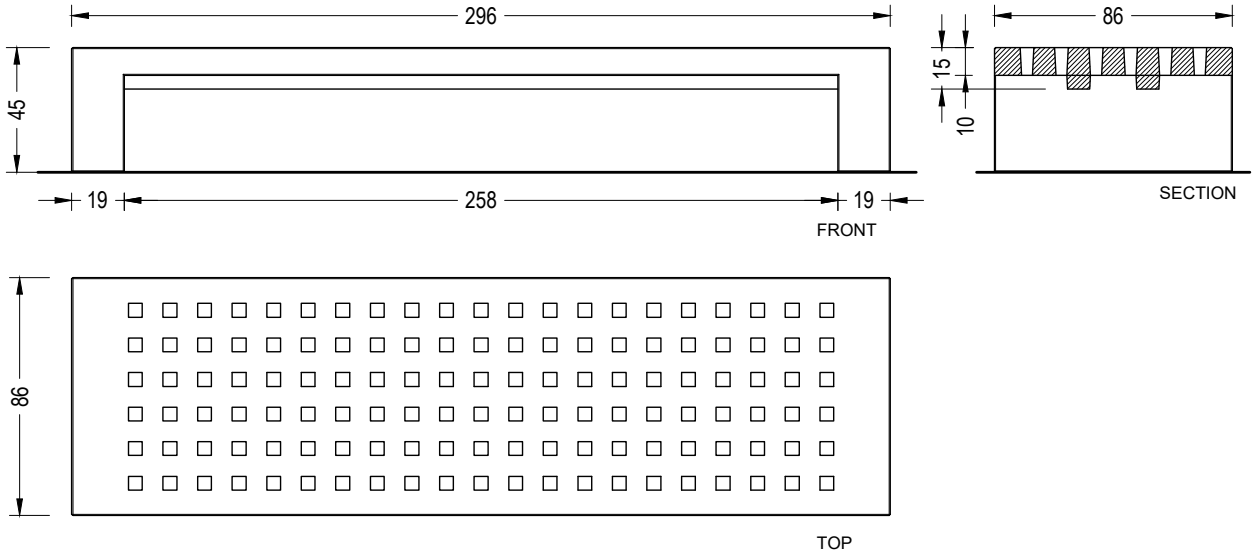

Mayo 220

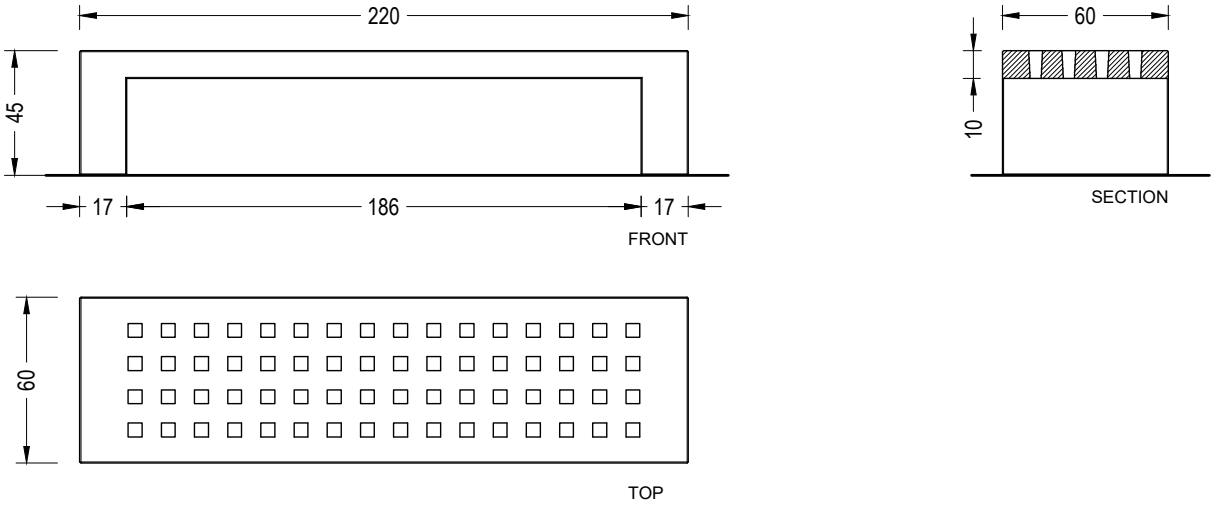



Warranty

5 years in all its components.

The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com

GA-2005/0072 SST-0090/2010 ER-0403/2016