

With the austere sensuality that characterises the design of the authors, the *Bruno* bench resolves one of the main challenges of outdoor benches, that of striking a balance between resistance to atmospheric conditions and comfort for users. Solid and resistant, but with stylised lines and a lightweight appearance, *Bruno* transfers the experience of domestic comfort to urban space and gardens.

UHPC | 📏 180 cm | ⚖️ 260 kg | 🪑 3

🔄 Update 04.03.2021



Functional

The curved sides bring rigidity and the inclination of the seat plane and rear opening allow for the drainage of rainwater.

Ergonomic

The height and inclination of the seat, the angle of the back and the curve of the armrest provide support to the lumbar region in a natural resting position.

Ecological

The lightweight nature of the UHPC-Slimconcrete products makes them easy to transport and reduces energy consumption in their fabrication. Their 100% recyclable mate-

rial composition optimises their life cycle. The extremely low water absorption properties of this material improve its behaviour in the face of fragmentation due to freeze cycles in places with harsh climates.

Material

A single piece of UHPC-Slimconcrete that permits the design of durable, lightweight elements with a minimum structural cross-section, due to its high resistance to compression, bending, impact and wear.

Installation

It is easy to lift and handle with slings and is anchored to the paving with four threaded bolts.



BRUNO



Iscofet
®

1. Bench

Bruno




Dimensions180x65x46 (78) cm

Weight260 kg

1.1 General features

Material	Hormigón UHPC	Fixing	Anchored with screws
----------	---------------	--------	----------------------



Finish	Etched and waterproofed
--------	-------------------------

Colours			
	UHPC GR. Grey	UHPC BL. White	UHPC BG. Beige


1.2 Installation system

Hoisting
(W=260Kg)

Installation
Drill pavement Ø 14 and fill with resin or fat mortar. Tightly the screw the 4 stud bolt M12 x 140. Centre and caulk and fill up the embedding zone.

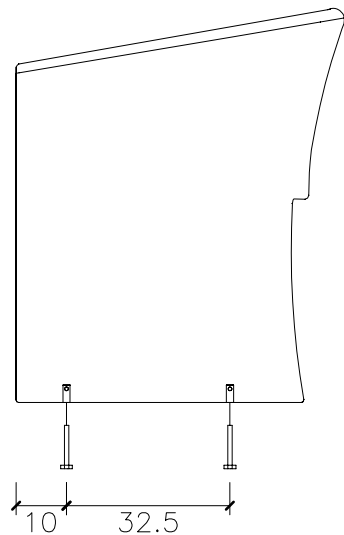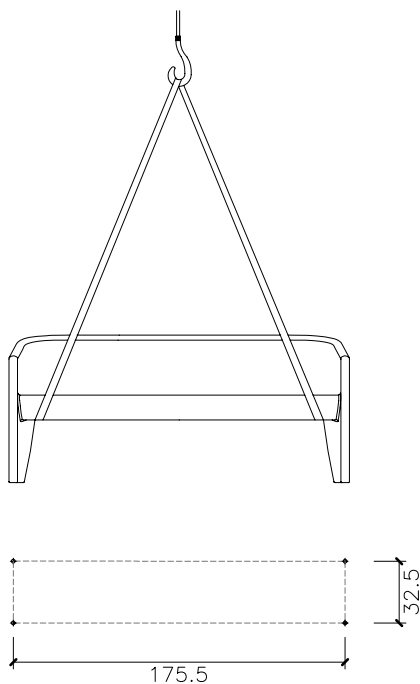

Bruno

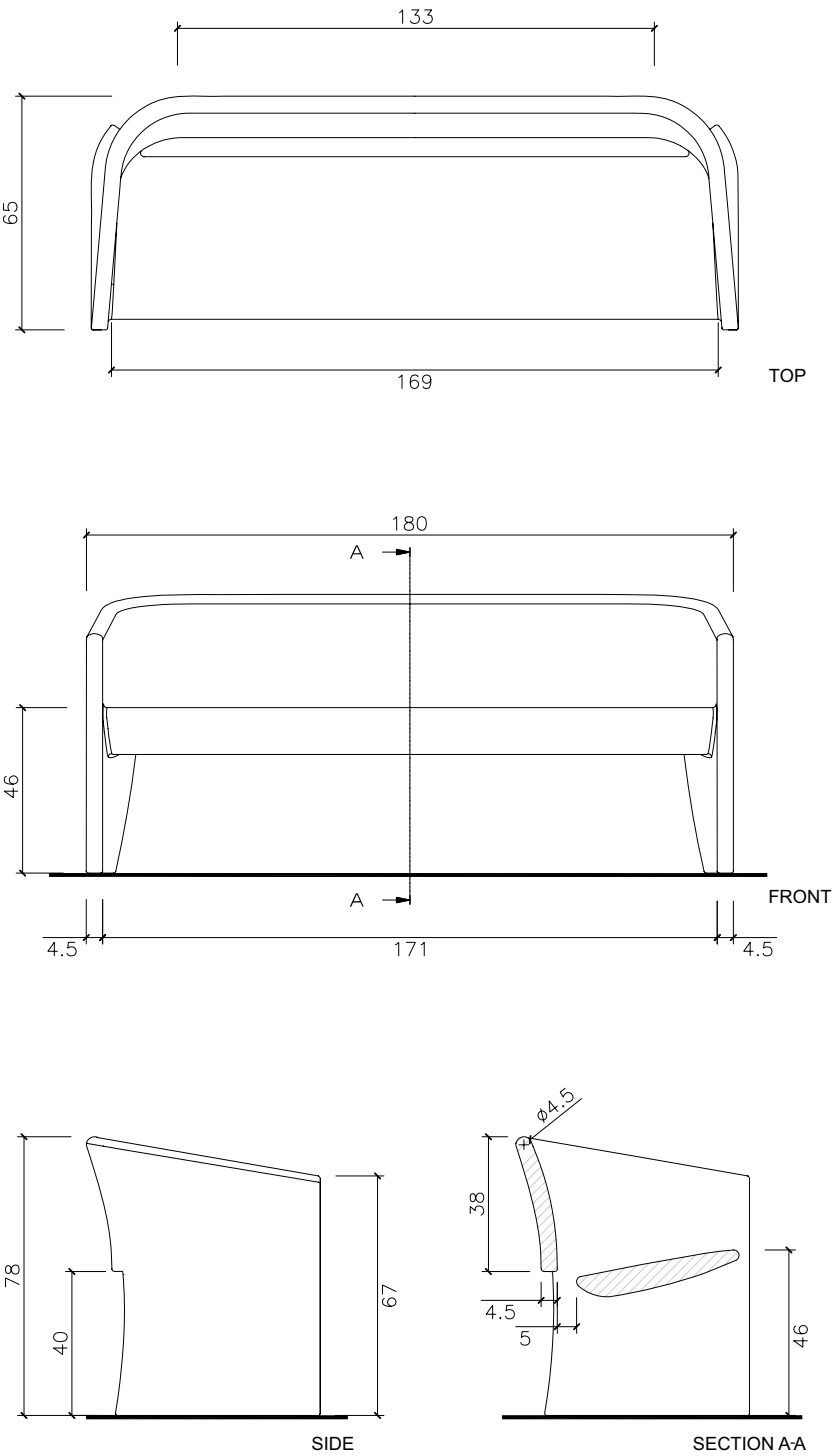



Warranty

5 years in all its components.

The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com



GA-2005/0072 SST-0090/2010 ER-0403/2016