HARDSCAPE PRODUCTS


www.hardscapeproducts.co.uk
Telephone: 01204 565 500 **Email:** enq@hardscape.co.uk
Hardscape Products Ltd., Eagley House, Deakins Business Park, Egerton, Bolton, Lancashire, BL7 9RP

Umber

Shepley Yorkstone

Shepley Yorkstone, with its distinctive blue and buff colouring, is a naturally strong and reliable stone, offering excellent slip resistance and strength for use in both pedestrian areas and trafficked environments.

SPECIFICATION	SKU: SAN-ENG-UMB-007	
Material	Sandstone	
Finish	Diamond Sawn, Flamed, Sandblasted, Shotblasted	
Density	-	2480 kg/m³
GWP (total) kgCO2e	ISO 14025 / EN 15804	-
Compressive Strength	BS EN 1926:2006	94 MPa LEV
Compressive Strength (Freeze/Thaw Resistance)	BS EN 1926:2006	-
PPV (Before/After)	BS EN 7932:2003	-
Flexural Freeze/Thaw	BS EN 12371:2010	-
Flexural Strength	BS EN 12372:2006	17.8 MPa LEV
Light Reflectance Value	BS EN 84369:2008	Sawn 33.8 LRV
Open Porosity	BS EN 1936:2006	8.8 %
Slip Resistance	BS EN 13036-4, BS 7976	Sawn 86 (wet), 99 (dry) SRV/USRV
Water Absorption	BS EN 13755:2008	2.6%
Abrasion Resistance	BS EN 14157:2004	22.5mm

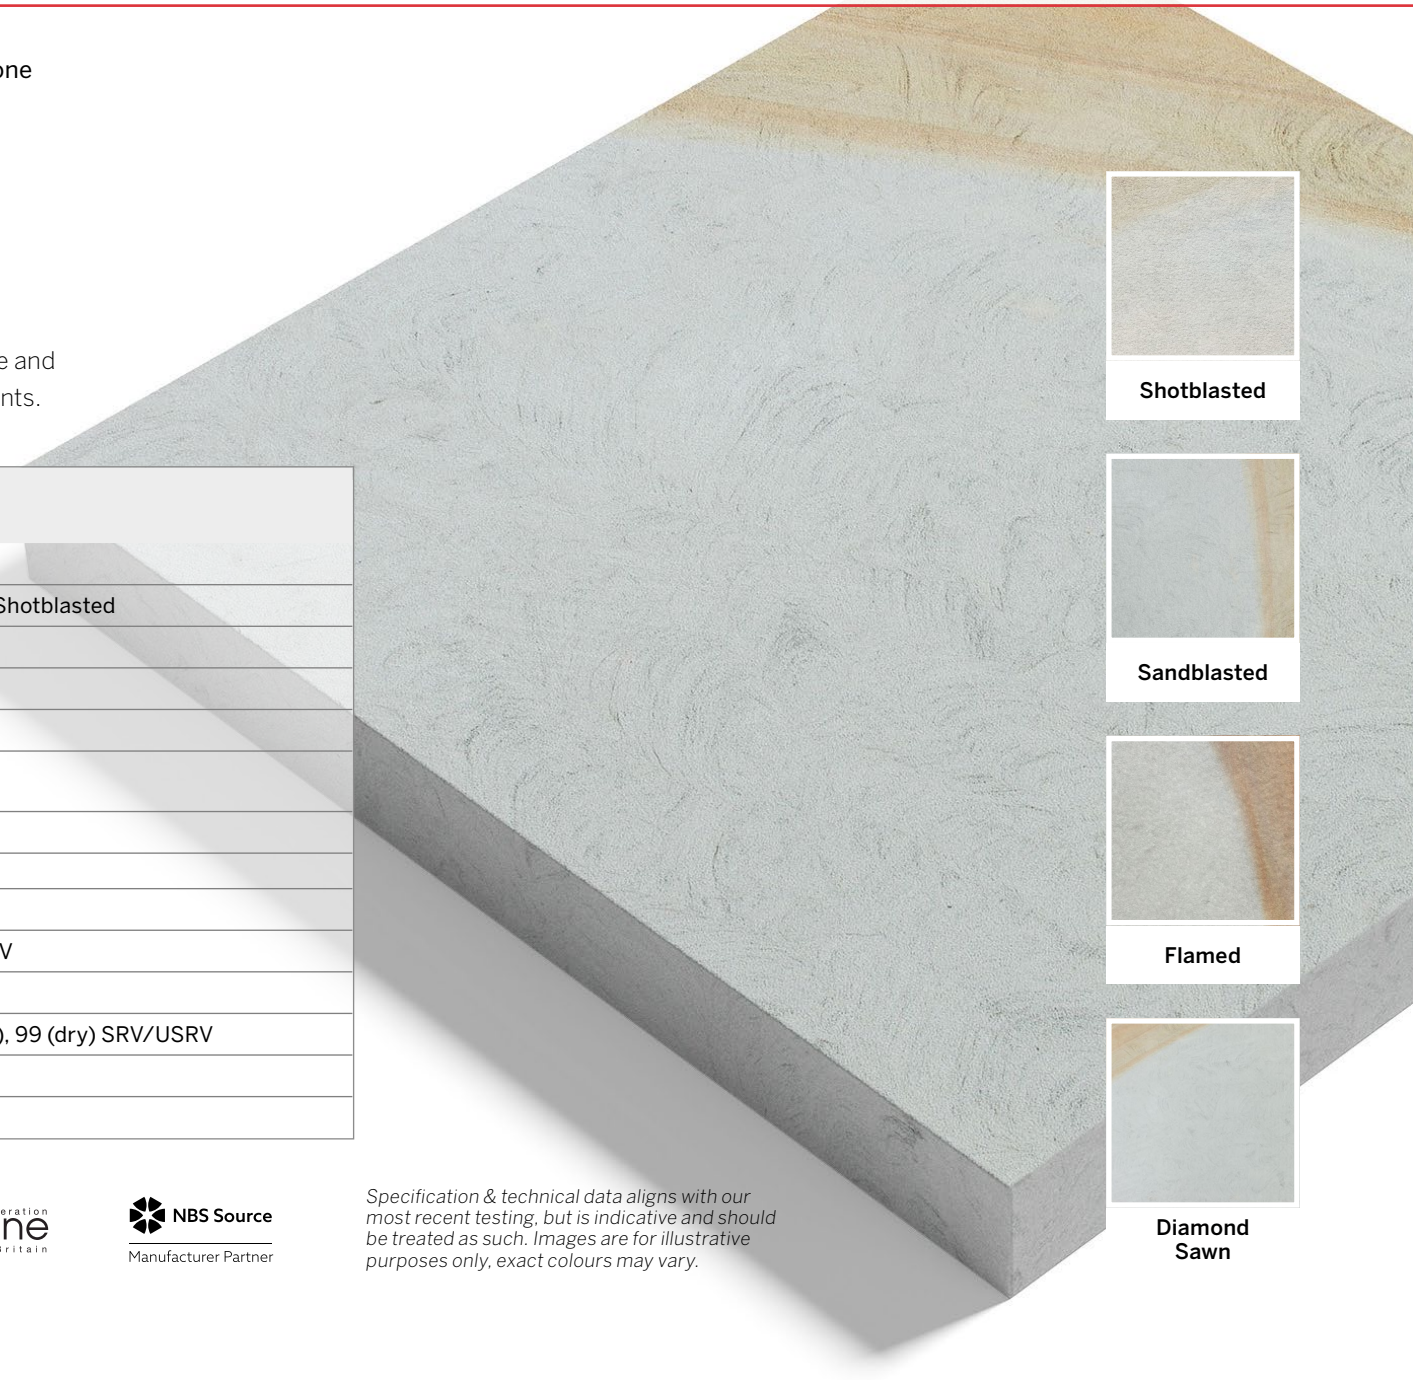

Shotblasted

Sandblasted

Flamed

Diamond Sawn

Ethical Stone Register Declaration Level

Federation Stone Great Britain

NBS Source Manufacturer Partner

Specification & technical data aligns with our most recent testing, but is indicative and should be treated as such. Images are for illustrative purposes only, exact colours may vary.